

Contents

1	QR code
1	Notice
2	Password
3	Warning
4	Initial Interface
5	Scan List
6	Recliner Chair
7	2 Seater
8	3 Seater
9	Control Screen (Sitting Position)
10	Control Screen (Standing Position)
11	Name Customization
12	Functional Menu
14	Motion Control Screen
16	Lighted Cup Holder Control Screen
18	LED Light Strip Control Screen
20	Reading Light Control Screen



Scan QR Code
Above for Apple iOS App Store
or search Smart Comfort by Synargy



Scan QR Code
Above for Android Google Play Store
or search Smart Comfort by Synargy

Notice:

1. Before connecting the furniture to your device via Bluetooth, please ensure that the furniture is correctly assembled and connected to the power supply according to the Assembly Instructions.
2. All LED lights (i.e.: light strip/lighted cupholders/reading light) will turn off automatically 60 minutes after last operation, and can always be turned back on using the app.
3. The effective range for Bluetooth connection is within 10 metres (approximately 33 feet), without major barrier blocking the signal.
4. Only one device can connect at a time to the 2 Seater and 3 Seater.



WARNING! ENTRAPMENT OR CRUSHING RISK


Ensure there is no person, animal or item obstructing the area under the footrest before operating this device. Only operate when the device is within your line of sight.

Password

The default password is 999999
The password only needs to be entered the first time the app is opened.



Warning

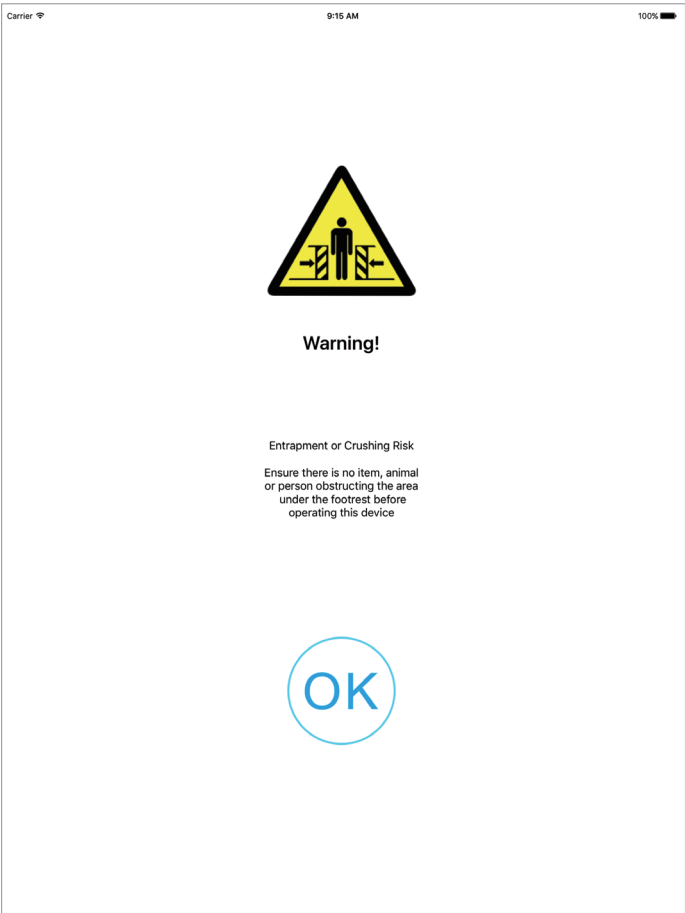


Initial Interface

When the app is opened, the initial screen will be displayed as below:



NO.	Function
1	Click on "SELECT" to see the scan list where all furniture available for Bluetooth connection are listed.

Scan List

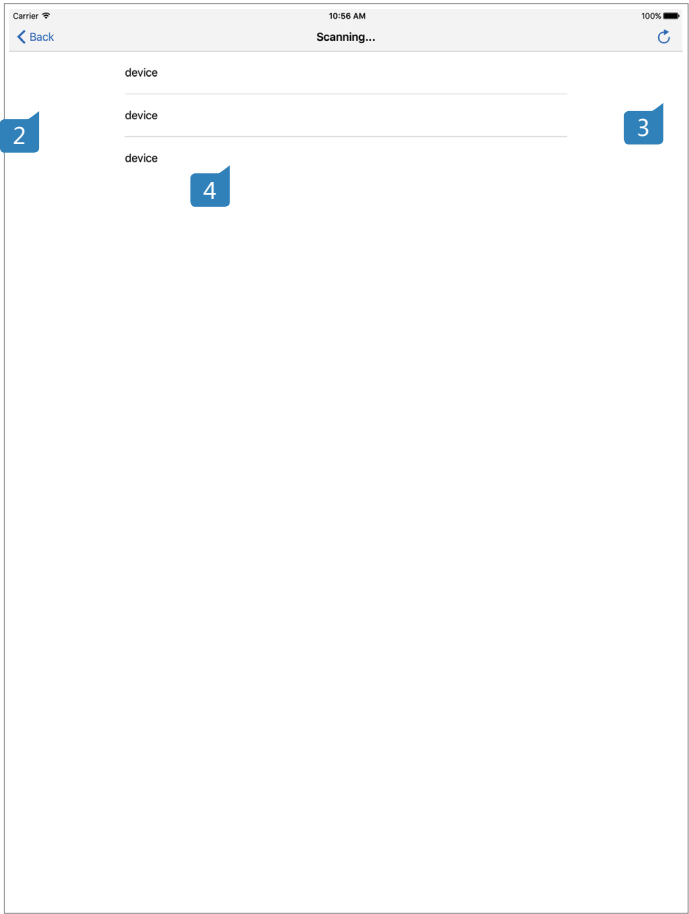


NO.	Function
2	Click on the "Back" button to return to the initial interface
3	Click on the "Refresh" (clockwise open circle arrow, ↻) button to re-scan and refresh the Scan List
4	Scan List, click on the name of any listed furniture to connect it to the device and enter the control interface


After selecting listed furniture and connecting it to the device, the app will enter the Control Screen (shown on the following pages). The app supports three (3) different types of furniture: Recliner chair, 2 Seater and 3 Seater*.

Note*: The 3 Seater only has two (2) reclining seats (one on each side), while the middle seat is NOT designed to recline.


Recliner Chair

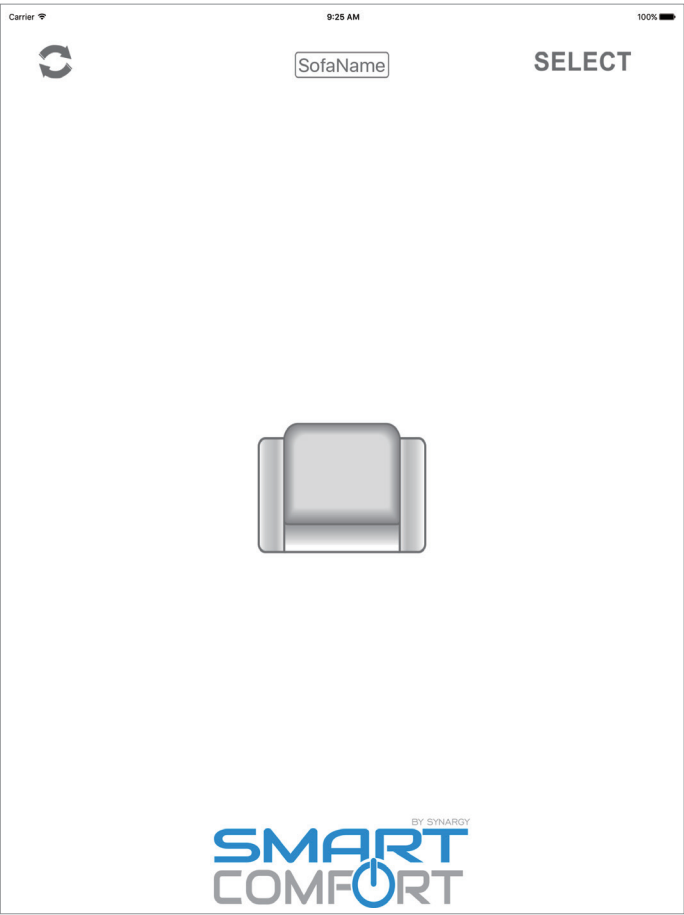

2 Seater

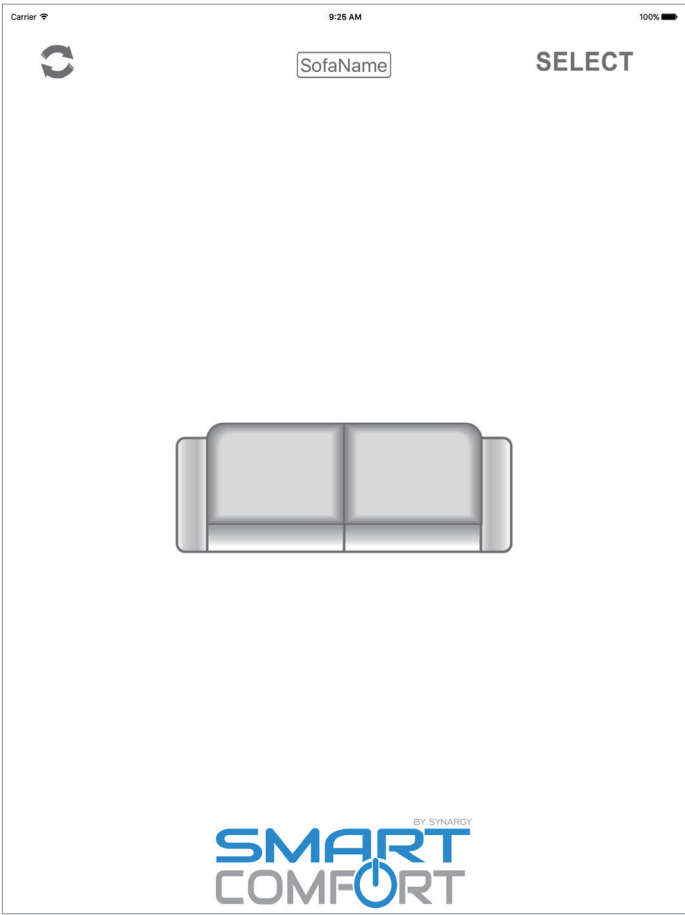


3 Seater

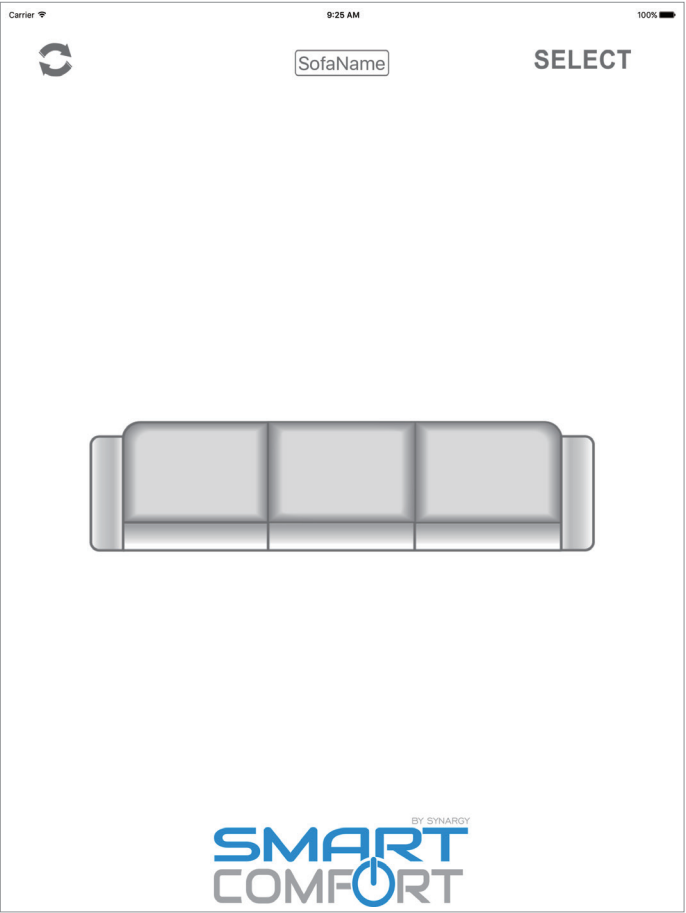

Control Screen (Top-Down View, Sitting Position)


Despite the different appearances of the interfaces, ALL three types of furniture supported by this app share the same controls. Below is an example of the control screen for the 3 Seater as a reference.

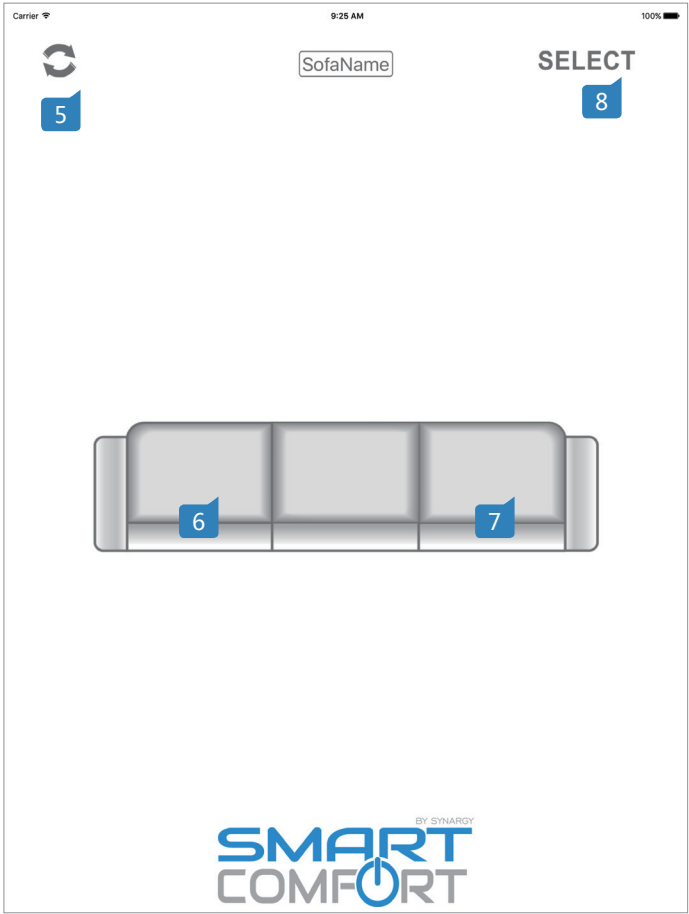


NO.	Function
5	Click on the Rotation (↻) button to switch the top-down view of 3 Seater accordingly to user's standing/sitting position
6&7	Click on the seat to enter function menu of left/right seat.
8	Click on the "SELECT" button again to enter the scan list, where the option of changing furniture is provided.

Control Screen

(Top-Down View, Rotated to Standing Position)

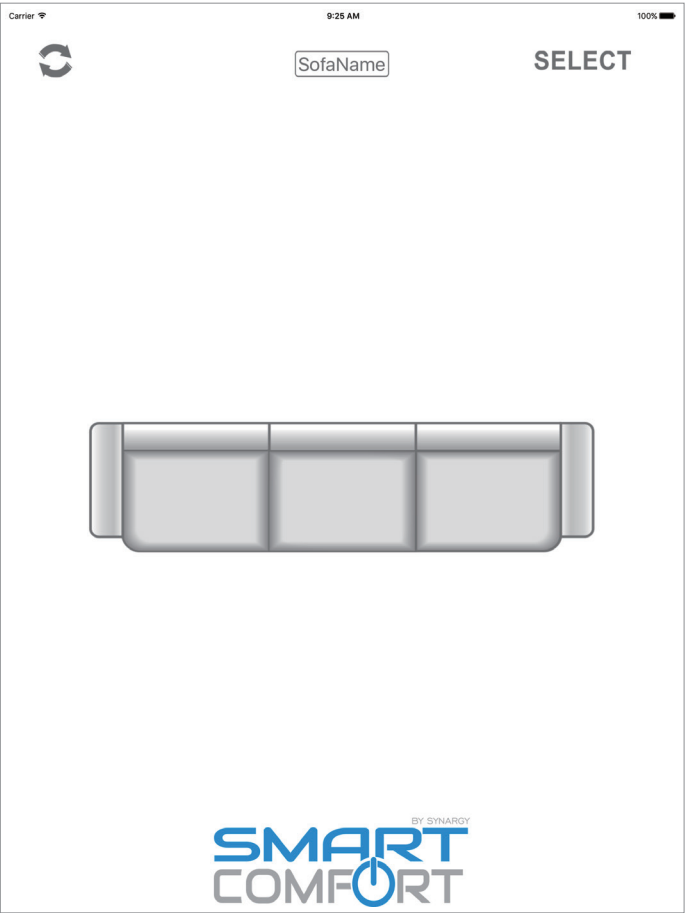


Name Customisation

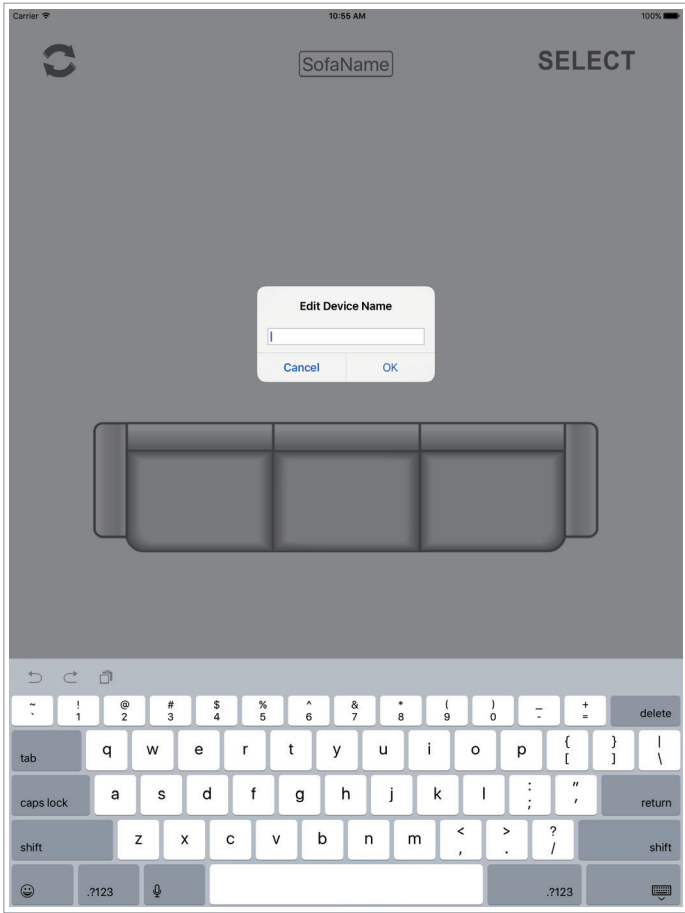

Above is the Name Customisation where the option of changing the furniture name is provided for ease of identification.


Note: The app only supports customised furniture name length of 15 characters.

Functional Menu

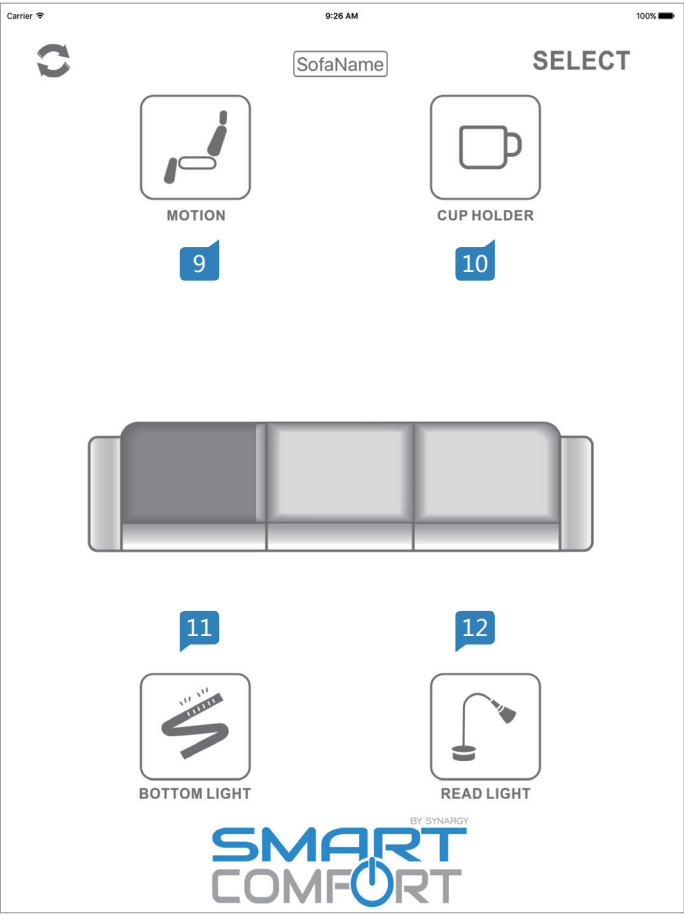

NO.	Function
9	Click on the "Motion" button to enter Motion Control Screen
10	Click on the "Cup Holder" button to enter Cup Holder Control Screen
11	Click on the "Bottom Light" button to enter LED Light Strip Control Screen
12	Click on the "Read Light" button to enter Reading Light Control Screen


Motion Control Screen (using LEFT seat as example)

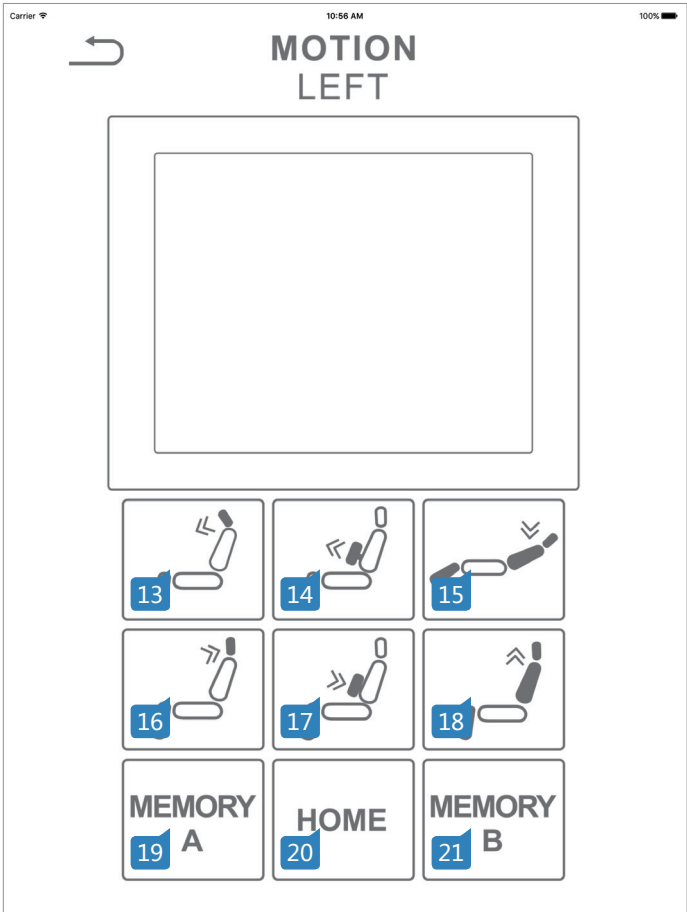

NO.	Function
13	Press and HOLD to raise power headrest, release button to stop
14	Press and HOLD to raise power lumbar, release button to stop
15	Press and HOLD to recline the back and open the footrest, release button to stop
16	Press and HOLD to lower power headrest, release button to stop
17	Press and HOLD to lower power lumbar, release button to stop
18	Press and HOLD to close the back and the footrest, release button to stop
19&21	When reclined at desired position, press and HOLD to set up memory position (two memory positions available for each seat); a textbox that says "Memory Success" will appear on the screen once the memory position is successfully set up. After successfully setting up the memory position, click the button once to return the seat to the preset memory position.
20	Press and HOLD to close all functionality, release button to stop


Note*: Whenever the furniture is powered for the first time / reconnected to power, operating any motor will cause all motors to automatically close to home position due to safety design.

Lighted Cup Holder Control Screen

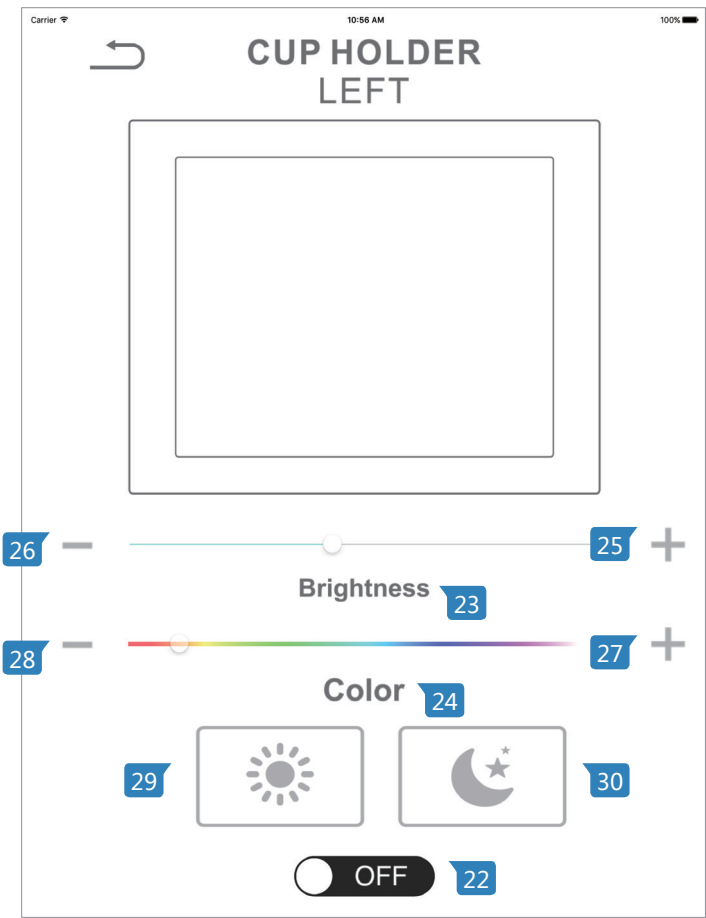


NO.	Function
22	Click to turn cup holder LED light ON/OFF
23	Cup holder light brightness dimmer bar. Slide the dimmer to the left/right to dim down/brighten up the LED light rim on the cup holder
24	Cup holder light color "rainbow bar" , slide left/right for desired color
25	Click on the "+" button next to the brightness dimmer bar to brighten up LED light on cup holder.
26	Click on the "-" button next to the brightness dimmer bar to dim down LED light on cup holder.
27	Click on the "+" button next to the rainbow bar to move slider to the right
28	Click on the "-" button next to the rainbow bar to move slider to the left
29	Click on the "☀️" button to activate Daylight Mode on cup holder light
30	Click on the "🌙" button to activate Night Mode on cup holder light

LED Light Strip Control Screen

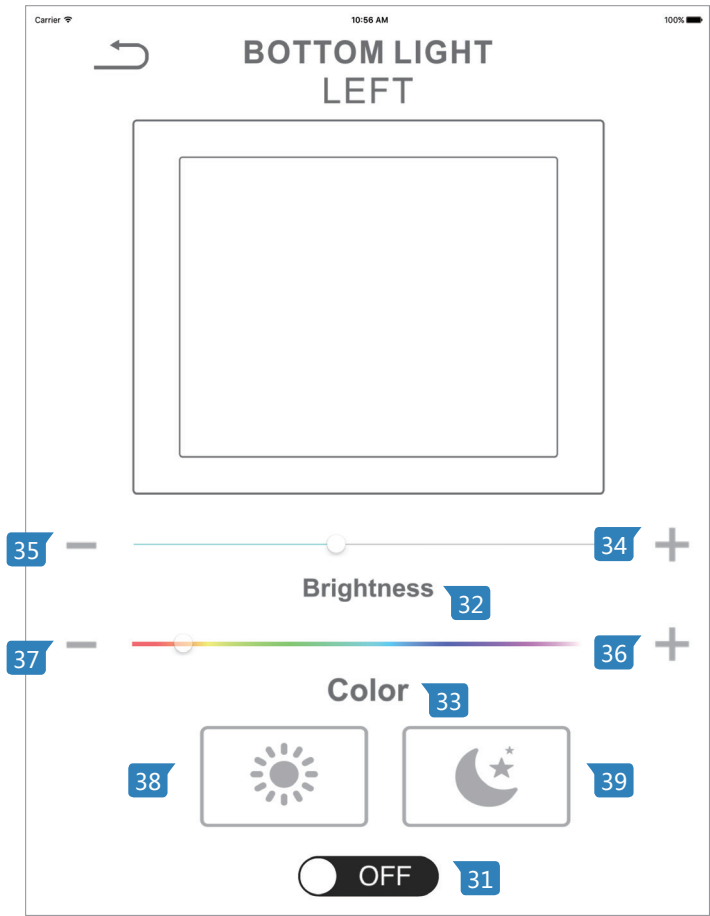

NO.	Function
31	Click to turn LED light strip ON/OFF
32	LED light strip brightness dimmer bar. Slide the dimmer to the left/right to dim down/brighten up the LED light strip
33	LED light strip color "rainbow bar" , slide left/right for desired color
34	Click on the "+" button next to the brightness dimmer bar to brighten up LED light strip.
35	Click on the "-" button next to the brightness dimmer bar to dim down LED light on strip.
36	Click on the "+" button next to the rainbow bar to move slider to the right
37	Click on the "-" button next to the rainbow bar to move slider to the left
38	Click on the "☀️" button to activate Daylight Mode on LED light strip
39	Click on the "🌙" button to activate Night Mode on LED light strip

Reading Light Control Screen

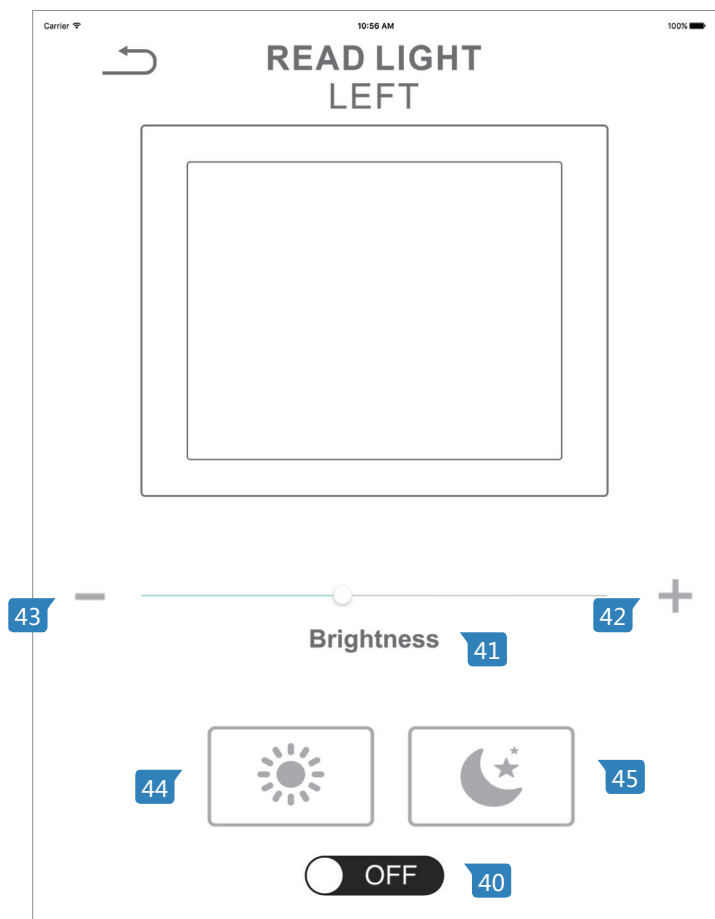

NO.	Function
40	Click to turn reading light ON/OFF
41	Reading light brightness dimmer bar. Slide the dimmer to the left/right to dim down/brighten up the LED light strip
42	Click on the "+" button next to the brightness dimmer bar to brighten up the reading light.
43	Click on the "-" button next to the brightness dimmer bar to dim down the reading light.
44	Click on the "☀️" button to activate Daylight Mode on the reading light.
45	Click on the "🌙" button to activate Night Mode on the reading light.